

# AVD748(D)

## 16CH H.264 IVS DVR

USB Mouse Control with GUI Display



## FEATURES

### Remote Surveillance

- ❖ Mobile surveillance via our self-developed and free program, "EagleEyes", is supported on many popular mobile platforms, such as iPhone, BlackBerry, Windows Mobile & Symbian.
- ❖ Network surveillance via the licensed software "Video Viewer", Internet Explorer, Mozilla Firefox or Google Chrome web browser, and QuickTime player is supported with up to 10 users' login simultaneously.

### iPhone Push Notification

- ❖ Supports sending Push Notification to your iPhone for instant event notification when a man is detected (human detection).

### Intelligent Surveillance

- ❖ **Virtual Fence**  
A virtual intruder detection line is set to detect intruders crossing the detection line.
- ❖ **Flow Counting**  
A virtual detection line is set to detect the moving direction of pedestrians for flow counting.
- ❖ **Single Channel Motion Recording**  
Only the channel with an event will be recorded to effectively save a significant amount of hard disk space and have the maximized recording time.
- ❖ Supports pre-alarm recording.

### USB Mouse Control with GUI OSD

- ❖ The GUI OSD interface is provided and used with your USB mouse.

### DVR / Camera Communication System (DCCS)

- ❖ For PTZ or zoom-lens control cameras, there's no need to additionally connect RS485 control wires for camera control because the control signals can be transferred by coaxial cables directly.
- ❖ Camera installation is highly simplified to lower labor cost and working hours.

### Remote Independent Operation

- ❖ Channel switching is fully independent from the local site, allowing users to have private image monitoring remotely.

### H.264 Video Compression Technology

- ❖ Highly improves video quality for live, recording, and network.
- ❖ Recording file size is minimized for longest recording time.
- ❖ Lower bit rate required for fastest network transfer.

### Multiplex

- ❖ Allows live display, record, playback, backup and network operation at the same time.


### Backup Function

- ❖ Supports DVD writer (optional), USB flash drive and network backup.

### Audio / Video Support

- ❖ 4 audio-in, 2 audio-out to record sounds.
- ❖ VGA interface built-in.

## REAR PANEL

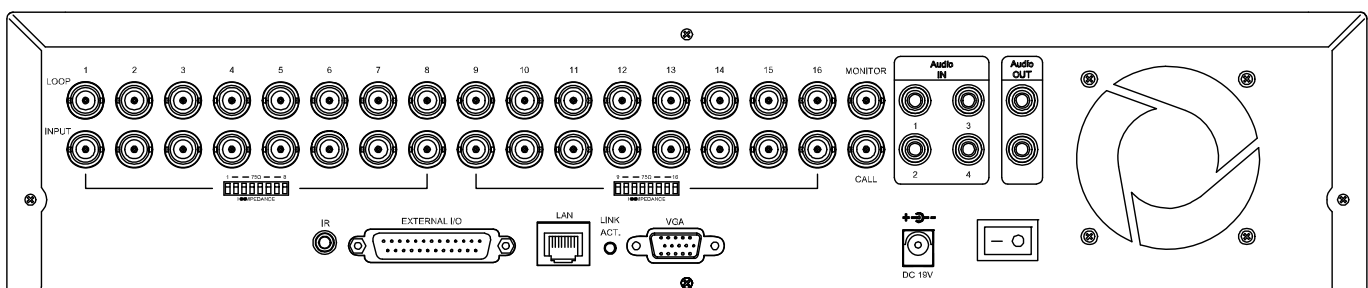

## SPECIFICATIONS

Video System	NTSC / PAL (auto detection)	
Video Compression Format	H.264	
Video Input	16 Channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Loop Input	16 Channels (Composite video signal 1 Vp-p 75Ω BNC)	
Video Output (BNC)	Main Monitor	For stable display
	Call Monitor	For sequence display
Video Output (VGA)	Built-in VGA output for LCD monitor	
Audio Input / Output	4 audio inputs, 2 audio output (Mono)	
Multiplex Operating	Supports live display, recording, playback, backup, and network simultaneously	
Maximum Recording Rate	Frame	704×480 pixels with 120 IPS <NTSC> / 704×576 pixels with 100 IPS <PAL>
	Field	704×240 pixels with 240 IPS <NTSC> / 704×288 pixels with 200 IPS <PAL>
	CIF	352×240 pixels with 480 IPS <NTSC> / 352×288 pixels with 400 IPS <PAL>
DCCS Support	YES (All channels)	
IVS Support	YES (4 channels)	
Recording Mode	Manual / Timer / Motion / Alarm / Remote	
Recording Quality Options	Best, High, Normal and Basic	
Pre-alarm Recording	YES (8 MB)	
HDD Type	SATA	
HDD Storage	Accommodates 2 SATA HDDs (1 HDD capacity up to 2TB)	
Quick Search	Time / Motion / Alarm search mode	
Backup Device	DVD writer (optional) / USB flash drive / network	
Web Transmitting Compression Format	H.264	
Network Live Audio	YES	
Ethernet	10/100 Base-T.	
Network Protocol	TCP/IP, PPPOE, DHCP and DDNS (Dynamic IP)	
Network Surveillance Interface	Licensed software "Video Viewer" / Internet Explorer, Mozilla Firefox or Google Chrome web browser / QuickTime player (10 users access simultaneously)	
	*Operating System: Windows 7 / Vista / XP / 2000	
Basic Remote Independent Operation	YES	
Event Notification	By FTP / E-Mail	
R.E.T.R. (Remote Event Trigger Recording)	YES	
IR Remote Control	YES	
Mobile Surveillance	YES	
Motion Detection Area	16 × 12 grids per channel	
Motion Detection Sensitivity	4 adjustable parameters for accurate detection	
PTZ Control	YES	
External Alarm	16 inputs, 1 output	
Picture Zoom	2X digital zoom	
Key Lock (Password Protection)	YES	
User Level	Administrator & Operator	
Video Loss Detection	YES	
Camera Title	Supports up to 6 letters	
Video Adjustable	Hue / Color / Contrast / Brightness	
Date Display Format	YY/MM/DD, DD/MM/YY & MM/DD/YY	
Daylight Saving	YES	
Power Source (±10%)	DC 19V	
Power Consumption (±10%)	< 64 W	
Operating Temperature	10°C ~ 40°C (50°F ~104°F)	
Dimensions (mm)**	432(W) × 90(H) × 326(D)	
System Recovery	System auto recovery after power failure	
Optional Peripherals	Keyboard controller	

\*The specifications are subject to change without notice

\*\* Dimensional tolerance: ±5mm